


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 8 TOWNSHIP 15 RANGE 5
DATE: -3-10-01- 3-7-06
PARTY CHIEF: Whiteside Kiste
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 4-19-96

IN. S.P.C. E ZONE, NAD 83
NAME: 15050805
N: 501180.6769(m)
E: 71475.2877(m)

NOTE: This corner position
represents a title corner
and may not necessarily
be in the position of the
Record corner.

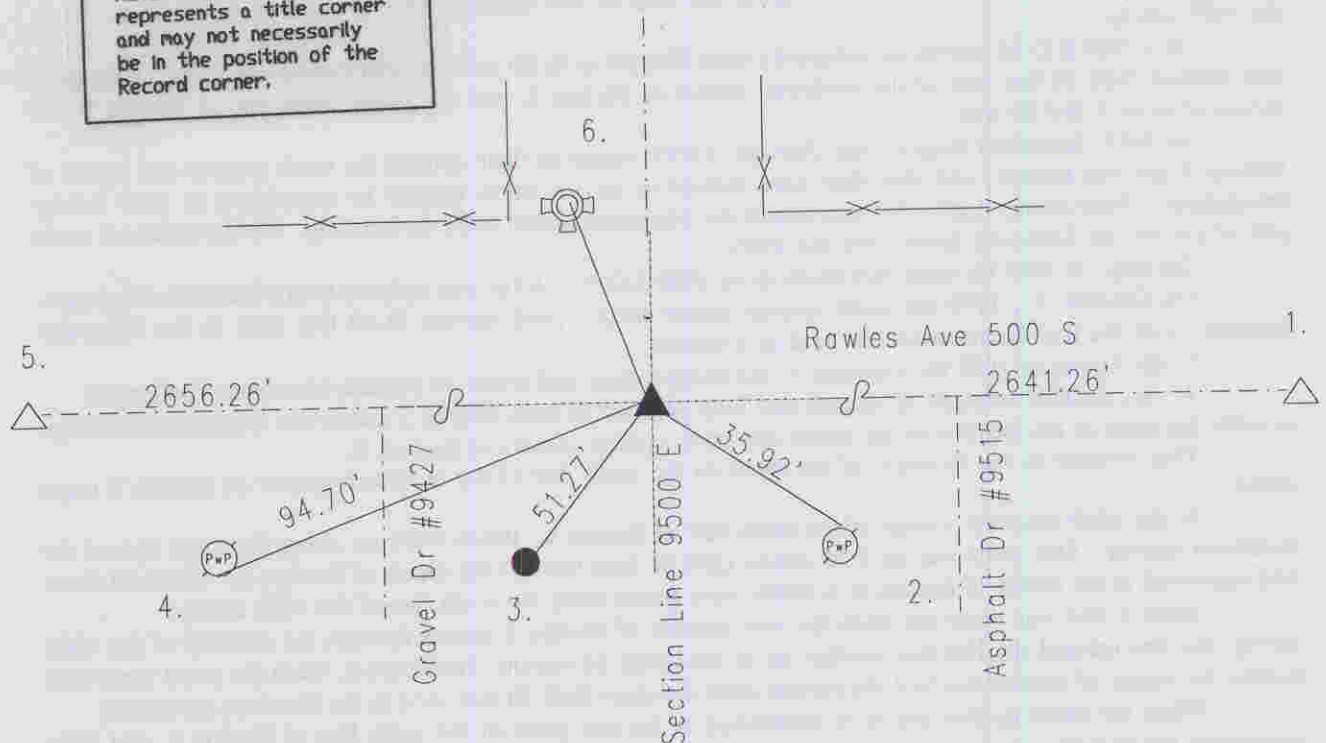

Original post set 1860 by Hosbrook called no stone but witnesses: 18" ash N 62 1/2 E 16 links; 36" beech S 66 W 39 links per Warren Township Legal Survey Book pg. 27. Wilcoxon 10-22-80 called a bolt set. Wilcoxon 5-28-93 called railroad spike 4" down. Excavated by Wilcoxon 11-19-96 and railroad spike found 4" down. No stone found. Harrison set per Schneider Engineering Survey.

15050805

REF.	DISTANCE	DESCRIPTION
1.	2641.26'	Due E to E Q corner (Harrison)
2.	35.92'	Cut 'x' in bolt N PwP#53-581B 15" up
3.	51.27'	5/8" rebar
4.	94.70'	PK nail S PwP#84-581 B 10" up
5.	2656.26'	Due W to W Q corner (Harrison)
6.	30.28'	Top nut of fire hydrant